

Product Specifications

15.6Inch Capacitive Touch Screen



Smart Split Screen



built-in WIFI



time switch



Remote release



Android system



fine definition



Loop Playback



LOGO custom made

Product Parameters

Tractor parameter	
Product features	Aluminum trim, anodized, brushed finish
	Metal backplate, structurally stable, with active heat dissipation and powder spraying process
	7H Physical fully tempered glass, impact-resistant and scratch-resistant
Product size	(L) 388.16 mm (Width) × 237.59 mm (Height) × 59.3 mm (including the thickness of the hanging bracket: 10 mm)
Packing measurement	(L) 478* (W) 333* (T) 95mm
Product weight	Net weight 6kg / Gross weight 6.5kg
Total power	20W
Standby power	≤0.5W
Sound speaker	8Ω / 5W*2
Input voltage	AC 100-240V , 50/60 Hz
Display parameters	
LCD size	15.6"
Backlight type	E-LED
Show area	343.76 (H) * 193.19(V)
Resolution ratio	1920*1080
Refresh rate	60zH
Luminance	250~300cd/m ²
Contrast ratio	≥1200: 1 (Typ.)
Viewing angle	178° (H) /178°(V)
Backlight lamp life	> 50,000 hours
System parameter	
Main chip	RK3399
CPU	Cortex-A72*2 +Cortex-A53*4 1.8Ghz


Product Parameters

Number of CPU cores	6-core (Quad Core)
GPU	Mali-T864
Running memory	4G
Internal storage	32G
System version	Android11.0
Port parameter	
Mainboard port	USB*2 , RS232*1 , AUDIO*1 , RJ45*1 , HDMI*1 , DC*1
Module parameters	
Camera	Built-in 5MP USB drive-free camera
Touch parameters	
Touch Standards	The standard of Promethean, a UNESCO supplier
Touch embedding method	Built-in all-in-one
Writing style	Finger, stylus
Touch points	10 drop
Touch accuracy	±2mm
Response speed of system	≤15ms
Touch count	Theory of infinite
Drivers	System automatically recognizes and drives without intervention
Support system	windows7/10, Android, Mac OS
Accessories	
Standard layout	Power cord*1, wall mount*1, remote control*1, instruction manual*1
Installation parameters	
Storage/Working Temperature	-10~+50 °C
Storage/Working Humidity	10%RH~90%RH

Product Parameters

Way to install	Wall-mounted (horizontal/vertical)
Wall bracket hole spacing	100*100mm
Principle of embedded installation	Unilateral +20mm

Dimension diagram

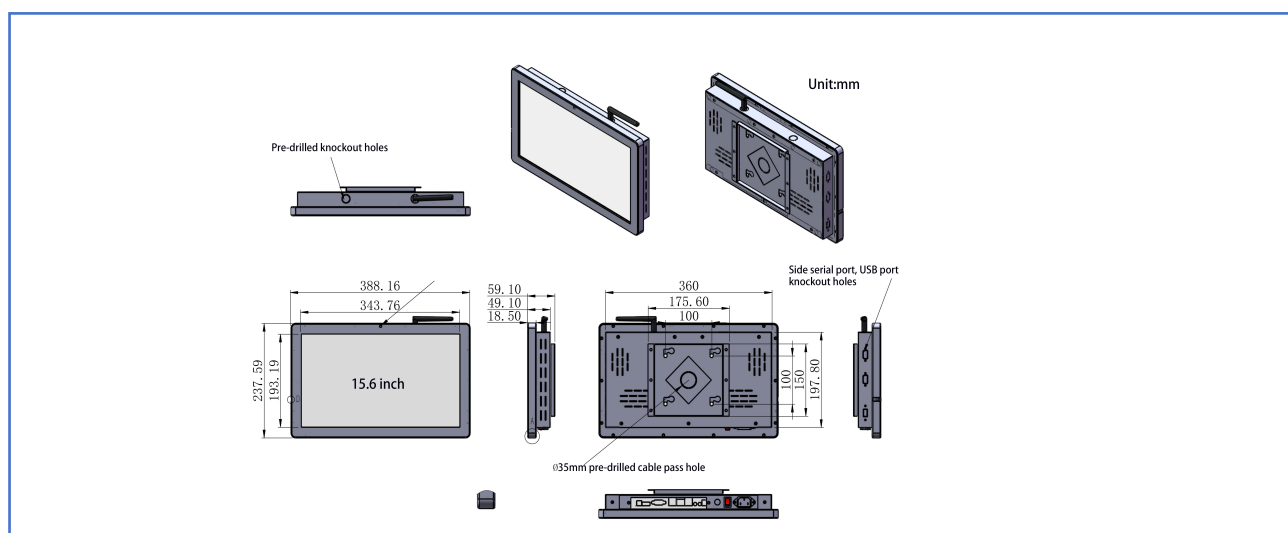

Product View



front outline



Back View

Statement

Actual dimensions/weight may vary due to manufacturing processes or environmental conditions. Please refer to the physical product for exact specifications. The product images in this specification are for illustrative purposes only. To ensure accurate specifications, textual descriptions and visual representations may be modified or revised without prior notice. For the latest version, please contact our designated representative.